



TANDEM KROSS 10/22 Magazine Shoulder Bolt Installation Instructions

V1.0

www.tandemkross.com


For more info or support contact CustomerService@tandemkross.com

Attention:

Before you begin, be certain that your rifle is clear and safe.

You will need an allen key or the TANDEM KROSS 10/22 Mag Takedown Tool. The internal parts are under spring tension so utilize eye protection.

1. Utilizing the Allen Key, loosen the stock shoulder bolt and remove it from the magazine. Set it aside, you will not be needing it again.

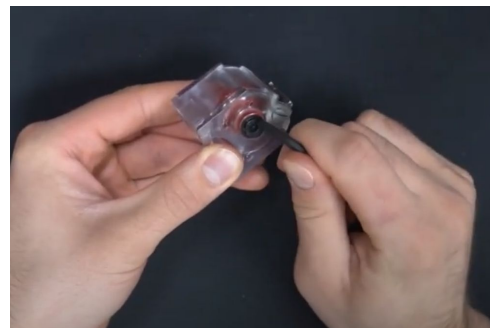

2. Remove the back side of the magazine housing and pop the stock nut out of it. Set the stock nut aside, you won't be needing it again. Leave the other components of the magazine in place.




5. Snap on the back side of the magazine housing. This will line up with the small stud on the feed lip and the center of the rotor. The hex cutout is facing out.



6. Insert the spring lifter into the bottom of the TANDEMKROSS 10/22 Double Kross Housing. This will push up the spring from the inside. Using the Nut holder, insert the Hex Nut into the holder.



7. Locate the hole in the bottom of the Hex Nut and align it to the end of the spring. Remove the spring lifter.

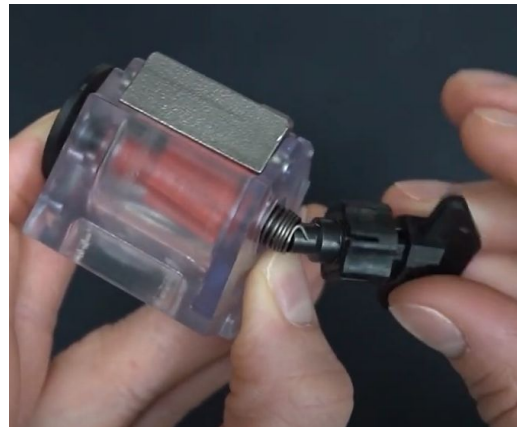

8. Turn the Hex Nut 2 full turns with the wing nut holder. Once the spring tension is high enough the hex nut will start to pull into the housing. Press the hex nut into the housing firmly. \



9. Insert the shoulder bolt, making sure it goes through the center of the spring coils, and tighten with the allen key.

