



TANDEMKROSS 10/22 Double Cross Installation Instructions

V1.0

www.tandemkross.com

For more info or support contact CustomerService@tandemkross.com

Attention:

Before you begin, be certain that your rifle is clear and safe.

You will need an allen key and needle nose pliers or the TANDEMKROSS 10/22 Mag Takedown Tool. The internal parts are under spring tension so utilize eye protection.

1. Utilizing the Allen Key. Remove the internal components from two (2) Ruger 10/22 Rotary Magazines. Use caution and wear eye protection as the parts are under spring tension. Do not remove the springs from the inside of the red rotary component.



2. Place the 2 red rotary components into the housing. The spring faces UP. Large tab facing out of the slot.




3. Install the 2 Metal Feed Ramps. The LARGER alignment stud goes toward the BOTTOM small stud on top. Looking close at the metal feed lip you will see one of the corners is cut off. This corner faces the inside of the housing.




4. Snap on the back side of the TANDEMKROSS 10/22 Double Kross Housing. This will line up with the small studs on the metal feed lips and the centers of the internal rotary components. The hex cutouts are facing out.



5. Insert the spring lifter into the bottom of the TANDEMKROSS 10/22 Double Kross Housing. This will push up the spring from the inside. Using the Nut holder, insert the Hex Nut into the holder.

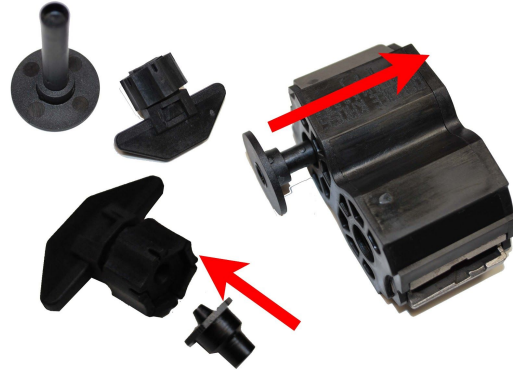

6. Locate the hole in the bottom of the Hex Nut and align it to the end of the spring. REMOVE the spring lifter and REPLACE it with the Hex Bolt. Before trying to tighten the spring in step 7 so that the spring has room to tighten around the bolt.

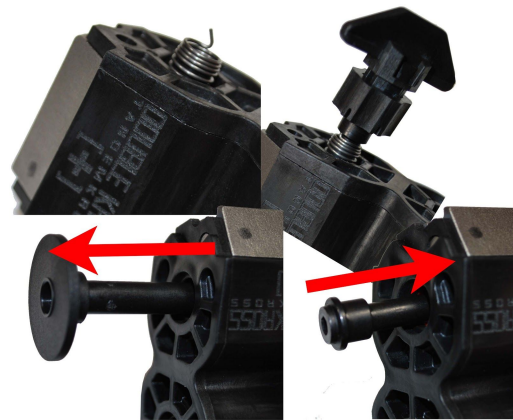

7. Turn the Hex Nut 1 and ½ Turns with the wing nut holder. Once the spring tension is high enough the hex nut will start to pull into the housing. Press the hex nut it into the housing firmly. Tighten the other end of the bolt with the Allen Key. Repeat Steps 5 and 6 for 2nd spring unit.

