



## Ruger Mark Series “Maximus” +1 Magazine Follower Installation Instructions

V1.0

[www.tandemkross.com](http://www.tandemkross.com)

For more info or support contact [CustomerService@tandemkross.com](mailto:CustomerService@tandemkross.com)

### **Attention:**


**Before you begin be certain that the magazine has no rounds in it.** You will need a small punch, allen wrench, or awl for the installation process. Be cautious of the spring and wear safety glasses.

1. Using an awl or similar tool, depress the magazine plunger and remove the base pad. **Be aware, the plunger is under spring tension.**




2. Remove the spring and plunger from the magazine, setting them aside.

3. Remove the button from the follower by gently pulling on it. The follower should easily slide out of the magazine body. Slide the “Maximus” follower into the magazine body and arrange it in the magazine so that the Thru Hole is visible. Insert the button through the magazine and into the “Maximus” follower.

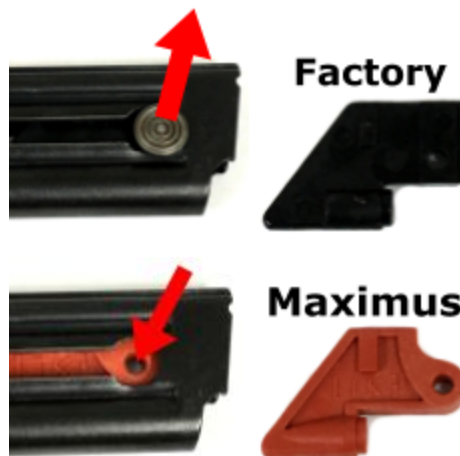

5. Reinsert the spring and plunger, sliding the follower down the length of the magazine. The follower should slide smoothly and freely.

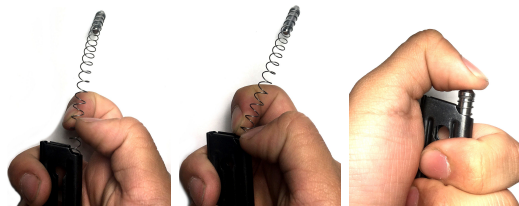

6. Carefully feed the spring into the magazine. Keep the spring under tension with your thumb.

7. Use the base pad to keep the spring under tension and slide the base pad back into place. There should be a soft click.

