



Ruger Mark IV 22/45 Magazine Bumper Installation Instructions

V1.0

www.tandemkross.com

For more info or support contact CustomerService@tandemkross.com

Attention:

Before you begin be certain that the magazine has no rounds in it. You will need a small punch, allen wrench, or awl for the installation process as well as a small Phillips screwdriver. Be cautious of the spring and wear safety glasses.

1. Assemble the top and bottom halves together.



2. Using the included screw, screw the two halves of the magazine bumper together as shown.



3. **Be sure to clear the magazine of any rounds.**


Holding the magazine so that the bottom faces up, you will see the plunger.

4. Using an Allen wrench, or a similar tool, lightly depress the plunger.

5. While the plunger is depressed, use your thumb and gently push the back of magazine base forward. Be mindful of the spring and keep it depressed with your thumb if able.



6. *Follow this step if the spring and plunger escaped. Lead the spring down the magazine a few coils at a time, as shown. The plunger can be held down with the thumb.*

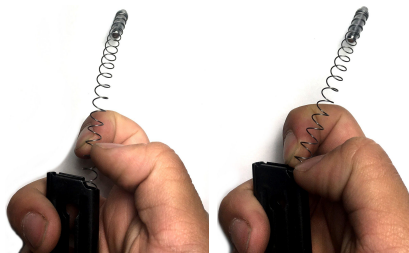

7. With the spring and plunger fully in the magazine body, depress the plunger with the back of the Tandemkross magazine bumper.



8. With the base pad in position, push it rearwards to slide it in place. You should hear a soft click.