



“Wingman” +4 Magazine Bumper for Ruger® LCP® II in .22LR

V1.0 www.tandemkross.com

For more info or support contact

CustomerService@tandemkross.com

Attention:


Before you begin, be certain that the firearm is clear and safe.

It is recommended to wear safety glasses as some parts are under spring tension.

You will need a small punch and a small Phillips head screwdriver in order to install this part.

Package contains 2 halves each of two bumpers, 2 “Green Springs”, and 4 screws.

1. Use the punch to depress the spring and plunger, allowing the magazine bumper to move.

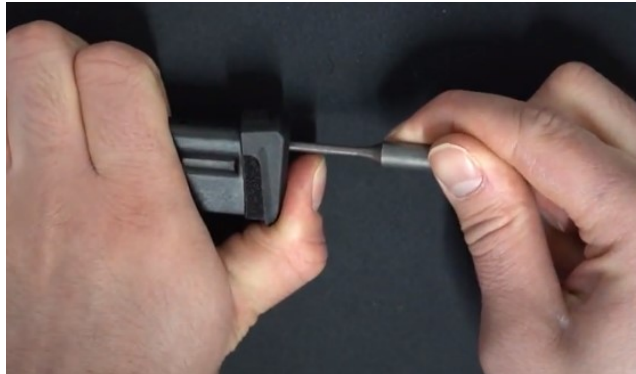

2. Carefully slide the bumper off the end of the magazine and remove the spring and plunger. Set these aside. You will not need them again.



3. Slide the top half of the “Wingman” bumper over the top end of the magazine as shown.



4. Insert the new “Green Spring” into the magazine and carefully compress it, one coil at a time, into the body of the magazine. A pencil or similar tool through the middle of the spring can be used to help guide it in.



5. Place the bottom half of the “Wingman” bumper over the end of the spring and compress the spring until the two bumper halves are in contact.



6. While holding the two halves of the bumper in place, screw the two screws into the screw holes on the bottom and top halves of the “Wingman”.

